(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



1 (1991) 1 (1985) 1 (1 (1994) 1991) 1 (

(43) International Publication Date 14 October 2004 (14.10.2004)

PCT

(10) International Publication Number WO 2004/088156 A1

(51) International Patent Classification⁷: 27/06

F16C 11/06,

(21) International Application Number:

PCT/GB2004/001298

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0307424.2

31 March 2003 (31.03.2003) GB

(71) Applicant (for all designated States except US): MINEBEA CO. LTD. [JP/JP]; 4106-73, Oaza Miyota, Miyota-Machi, Kitasaku-gun, Nagano 389-0293 (JP).


(72) Inventors; and

(75) Inventors/Applicants (for US only): SMITH, Paul, Raymond [GB/GB]; NMB-Minebea UK Ltd., Doddington Road, Lincoln LN6 3RA (GB). CLARKE, Allen, Christopher [GB/GB]; NMB-Minebea UK Ltd., Doddington Road, Lincoln LN6 3RA (GB).

- (74) Agent: FORRESTER KETLEY & CO; Forrester House, 52 Bounds Green Road, London N11 2EY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A SPHERICAL BEARING ARRANGEMENT

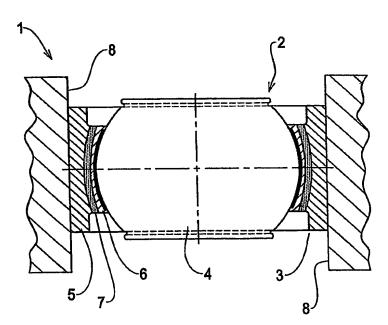

(57) Abstract: A bearing arrangement (1) comprising a spherical bearing (2) having a bearing housing (3) and a ball (4) located therein, the bearing housing (3) having a rigid outer race (5) and a rigid inner race (6) and an annular elastomeric portion (7) sandwiched between the races N (5, 6), wherein the outer race (5) of the bearing housing (3) is securely held in an interference fit hole (11).

WO 2004/088156 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

with amended claims

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.